


## SmartVerge® Linear Dry Verge System - Verge Units


Code: **GLV-RH/LH**

**Product Codes:**

Linear Dry Verge Unit (RH)	GLV-RH
Linear Dry Verge Unit (LH)	GLV-LH

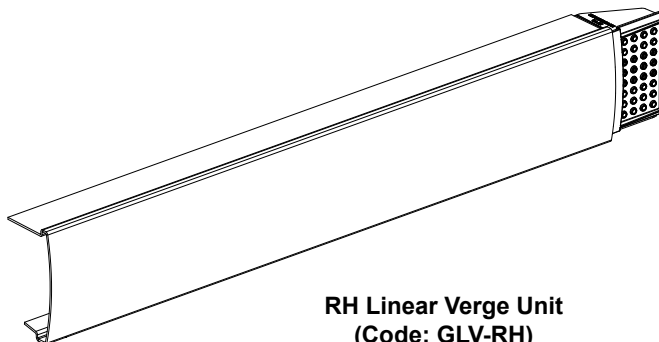

**RH Linear Verge Unit**  
(Code: GLV-RH)

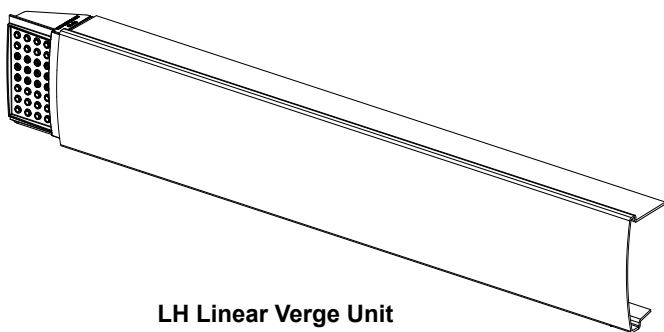

**LH Linear Verge Unit**  
(Code: GLV-LH)

**Description:**

The Manthorpe SmartVerge® Linear Dry Verge System provides a secure mechanical fixing solution for many types of flat/low profile roof coverings including Fibre Cement Slates, Natural Slates and Interlocking Plain Tiles.

The Linear Verge Units can be easily fitted to the verge of the roof in succession, helping to act as a secondary fixing at the verge edge to prevent wind uplift problems. The system is maintenance and mortar-free and can be fixed in all weather conditions.

The SmartVerge® Linear Dry Verge System is available in Slate Grey, Black, Terracotta and Brown to compliment any variation of roof design. The Linear Dry Verge System preserves the continuous line of the verge, providing a neat and attractive finish.

**Left & Right Hand:**



**Right Hand Verge**



**Left Hand Verge**

*Illustration shows left and right hand verge units as viewed from outside the building. Note: careful attention should be taken when specifying 'left' and 'right'.*

**BS 8612 Specifications**

- Independently tested to conform with the requirements of BS 8612.
- Performance data for the tests conducted on this product is available upon request.

**References:**

**BSI: British Standard 5534:2014**  
**BSI: British Standard 8612:2018**  
**NHBC Standards Chapter 7.2**

MANTHORPE BUILDING PRODUCTS LTD  
 MANTHORPE HOUSE  
 BRITAIN DRIVE  
 CODNOR GATE BUSINESS PARK  
 RIPLEY  
 DERBYSHIRE DE5 3ND

TEL: 01773 303 000  
 FAX: 01773 303 300  
 EMAIL:  
 mbp.care@manthorpebp.co.uk  
 WEB:  
 www.manthorpebp.co.uk

DRAWN	ISSUE DRAWN
R.P. 05/06/07	D.W 02/10/24

The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.

DRG No


**MBP 8253**

Issue

**07**  
1 of 2

### SmartVerge® Linear Dry Verge System - Verge Units

Code: **GLV-RH/LH**

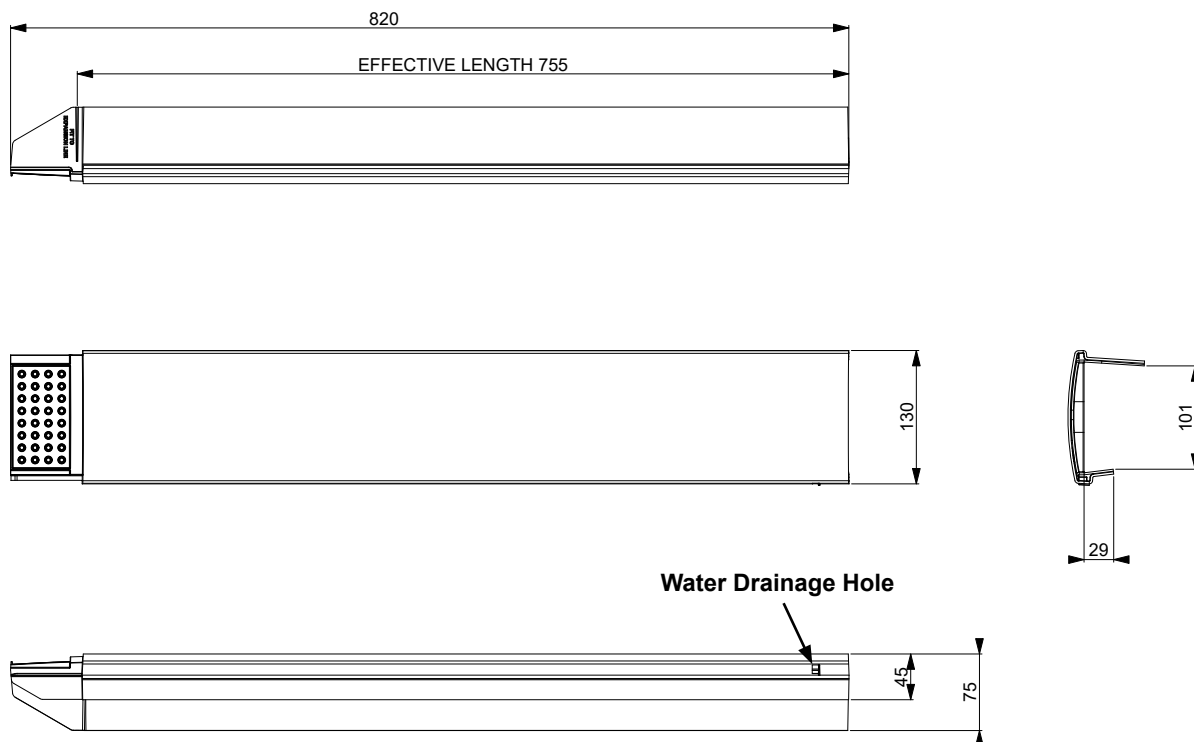

#### Guidance:

The Linear Verge Units should be used in conjunction with a continuous verge batten strip securely fixed up the run of the verge of the roof. Alternatively, they can be fixed directly onto the ends of the tiling battens if these are in good condition (this may require sawing each Linear Verge Unit to length to align with the batten ends).

Each unit features a water drainage hole so any water is discharge from each unit, dripping clear of the verge.

At the eaves, the initial Verge Unit should be secured using an additional Fixing Clip (**GLV-FC**). For roofs where the bottom course tiles are tilted upwards, a joint can be made good with an additional Verge Union (**GLV-VU**). The open end of the bottom unit can be closed with an Eaves End Closer (**GLV-EE**).

At the ridge, the Angled or Round Ridge End Cap (**GPPV-END-A** or **GPPV-END-R**) should be used to

<b>MAX THICKNESS OF VERGE</b>	100mm (Inc. Continuous Verge Batten)
<b>ROOF PITCH COMPATABILITY</b>	15° to 55° Pitch
<b>PACKING DETAILS</b>	10 Left or Right Units per box
<b>WEIGHT</b>	5.35 kg per box 485g per part
<b>MATERIAL</b>	Polypropylene
<b>MANUFACTURING PROCESS</b>	Injection Moulded
<b>COLOUR VARIATIONS (Illustrative)</b>	<p>Slate Grey (GR)    Black (BL)    Terracotta (TR)    Brown (BR)</p>

MANTHORPE BUILDING PRODUCTS LTD  
MANTHORPE HOUSE  
BRITTAIN DRIVE  
CODNOR GATE BUSINESS PARK  
RIPLEY  
DERBYSHIRE DE5 3ND

TEL: 01773 303 000  
FAX: 01773 303 300  
EMAIL: [mbp.care@manthorpebp.co.uk](mailto:mbp.care@manthorpebp.co.uk)  
WEB: [www.manthorpebp.co.uk](http://www.manthorpebp.co.uk)

<b>DRAWN</b>	<b>ISSUE DRAWN</b>
R.P. 05/06/07	D.W. 02/10/24

The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.

DRG No

**MBP 8253**

Issue

**07**  
2 of 2